



BENINCA[®]
TECHNOLOGY TO OPEN

DU.ITNVE24


AUTOMATIONS FOR SWINGING GATES

UNDERGROUND INSTALLATION

- Self-locking electromechanical operator
- A foundation box made of stainless steel or with cataphoresis coating for the actuator facilitates installation and makes it possible to replace the actuator without having to disassemble the existing gate
- Reliable and strong reduction unit with all the mechanical components made of steel

24 Vdc

- Self-locking 24Vdc electromechanical operator for intensive use
- Prepared for battery back-up system
- Amperometric anticrushing control

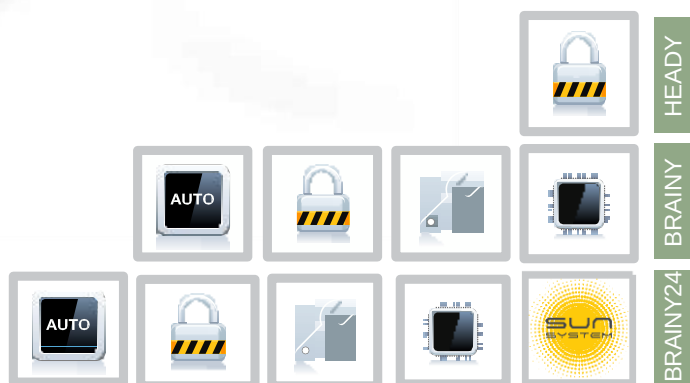

Personalized key operated
unlocking system



Prepared for 180°
release device



Prepared for battery back-up
system

Gates 'R Us

| Ph.: 9758 7157


sales@gatesrus.com.au
www.Gatesrus.com.au

Factory 5 / 14 Edina Rd. Ferntree
Gully
Victoria, AUSTRALIA 3156

DU.ITNVE24

GUIDE FOR CHOOSING



Choose the weight and the length in the chart and find out the most suitable model.



leaf max weight

gate length

	250 kg	300 kg	350 kg	400 kg	500 kg	550 kg	600 kg	700 kg	800 kg
1,5 m	DU.IT14NV	DU.IT14NV	DU.IT14N DU.IT24NVE DU.350NV	DU.IT14N DU.IT24NVE DU.350NV	DU.IT14N DU.IT24NVE DU.350N DU.350NV	DU.IT14N DU.IT24NVE DU.350N DU.350NV	DU.IT14N DU.350N DU.350NV	DU.IT14N DU.350N DU.350NV	DU.350N DU.350NV
2,1 m	DU.IT14N DU.IT14NV DU.IT24NVE DU.350NV	DU.IT14N DU.IT24NVE DU.350NV	DU.IT14N DU.IT24NVE DU.350NV	DU.IT14N DU.IT24NVE DU.350N DU.350NV	DU.IT14N DU.IT24NVE DU.350N DU.350NV	DU.IT14N DU.350N DU.350NV	DU.IT14N DU.350N DU.350NV	DU.350N DU.350NV	DU.350N
2,5 m	DU.IT14N DU.IT24NVE DU.350NV	DU.IT14N DU.IT24NVE DU.350NV	DU.IT14N DU.IT24NVE DU.350NV	DU.IT14N DU.IT24NVE DU.350N DU.350NV	DU.IT14N DU.IT24NVE DU.350N DU.350NV	DU.IT14N DU.350N DU.350NV	DU.350N DU.350NV	DU.350N	
3 m	DU.IT14N DU.IT24NVE DU.350NV	DU.IT14N DU.IT24NVE DU.350NV	DU.IT14N DU.IT24NVE DU.350NV	DU.IT14N DU.IT24NVE DU.350N DU.350NV	DU.IT14N DU.IT24NVE DU.350N DU.350NV	DU.350N	DU.350N		
3,5 m	DU.IT14N DU.IT24NVE DU.350N	DU.IT14N DU.IT24NVE DU.350N	DU.IT14N DU.IT24NVE DU.350N	DU.IT14N DU.350N	DU.IT14N DU.350N	DU.350N			
4 m	DU.350N	DU.350N	DU.350N	DU.350N	DU.350N				

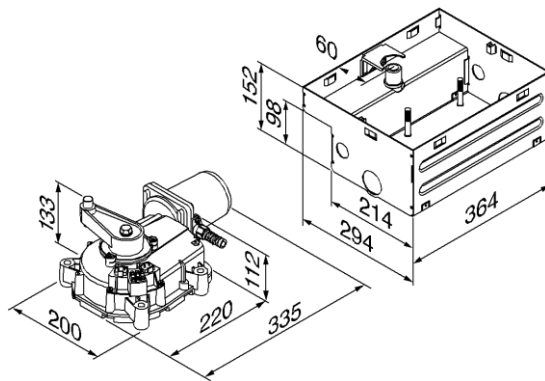

DU.ITNVE24

44 items per
pallet



INSTALLATION LIMITS DU.ITNVE24

LEAF DIMENSION	MAX. WEIGHT
2,1m	500 kg
2,5m	500 kg
3,0m	400 kg
3,5m	350 kg

TECHNICAL DATA	DU.ITNVE24
Power supply	230 Vac
Motor supply	24 Vdc
Max. absorbed current	11 A
Torque	280 Nm
Opening time	15"
Operation cycle use	Intensive
Protection level	IP 67
Operating temp.	-20°C / +50°C
Leaf max dimension	3.5m
Weight	10kg
Encoder	yes
Items per pallet No.	44

Gates R Us

| Ph.: 9758 7157

sales@gatesrus.com.au

www.gatesrus.com.au

Factory 5 / 14 Edina Rd. Ferntree Gully
Victoria, AUSTRALIA 3156